



Glass roof systems


Murano Puro
Murano Vetro
Murano Integrale
Murano Glissando
Murano Finestra

Murano
Glass Roofs



Just
enjoy life!

Lewens
MARKISEN

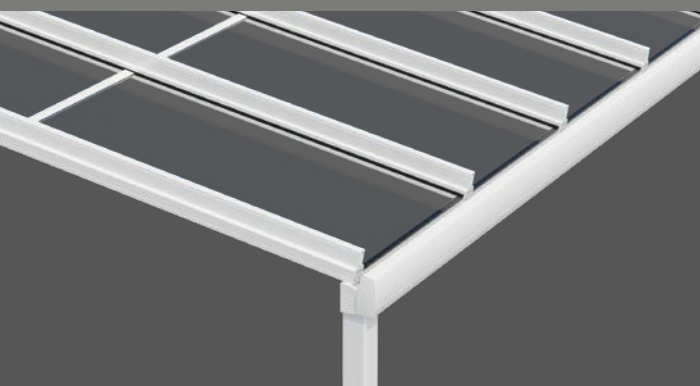



A cleverly conceived roof and a system to match

The glass roofs in the Murano series come in a variety of styles and configurations: compact and modern or traditional with roof overhang, laterally flush or with recessed posts, as a glass roof pure and simple or with integral awning. Complementary sliding glass panels and permanent glazing along with a host of comfort features complete the range.

All model developments are inspired by current trends and by the wishes and suggestions of customers and specialist dealers. The roofs combine advanced technology with practicality and good design.

Lewens' awnings and glass roofs are manufactured in a fully integrated operation, extending from the design and making up of the fabric to assembly, on a site covering over 30000 m². High-grade materials, intelligent design and precision in cutting and parts production, together with computer-aided automation in the manufacturing process, form the basis for products distinguished by their extreme reliability.

Consultancy and sales are entrusted to competent retailers, along with installation and on-site servicing. This creates proximity to the customer and ensures optimal service, so that our customers can just enjoy life!



Quality "made in Germany":

*all awnings and glass roofs from Lewens
are manufactured in Germany.*



Just
enjoy life!

Murano Puro



4



6

Murano Integrale



8



10

Murano Finestra

Permanent glazing



13

Murano Vetro

Murano Glissando

Sliding glass panels

Contents

Models

Murano Puro – the basic model	4
Murano Vetro A perfect retreat from the weather	6
Murano Integrale Optimal protection with integral awning	8
Murano Glissando Sliding glass panels: flexible weather protection and optional triangular infill	10
Murano Finestra Permanent glazing - for the ultimate in protection	13

Equipment

Quality and technology Focus on function and workmanship	14
Comfort options Electrics and wireless	15
Fabrics and colours Fabric collection and choice of frame colours	16
Technical data at a glance	18

To match

Ancona, Capri, Micro 860 (Z) / 1060 (Z), Micro 4000 Z, Micro 700 Glass roof, screen and side screen awnings	22
--	----



*Murano Puro
creates additional living space and prolongs the patio season.*

Murano Puro – glass roof

Weather protection for small and medium-sized patios



Flush type (B)

with front-facing posts

*The posts are in line with the gutter
for a compact, modern look.*

*Rainwater is drained via the rafters,
gutter and down the inside of the post.*



- Width max. 700 cm, depth max. 350 cm
- With 2 to 3 posts
(depending on load and type)
- Optional roof pitch: 3° to 10° (stepless)
- Box flush with wall
- Options:
LED lighting,
radiant heater



The essence of outdoor living: the Murano Puro glass roof offers a sturdy, versatile and attractively priced option for extending the living space. The posts are in line with the gutter, maximising the area under cover and turning even small patios into a really comfortable nook. Practical detail: the downpipe is integrated invisibly into the posts.

Decorative: glass joint with trim in frame colour for dividing the glass panes

Pure and simple:
Gutter with flat end cap



Slender rafters
give the Murano Puro an elegant appearance. Rafter spacings up to 120 cm wide permit the use of large glass panes (depending on roof size and load).



*Murano Vetro Flush type
with posts and gutter in a line.*

Murano Vetro – glass roof

The perfect retreat from the weather for large patios



Flush type (B)

with front-facing posts

*The posts are in line with the gutter
for a compact, modern look.
Rainwater is drained via the rafters,
gutter and down the inside of the post.*




Made to measure with centimetre accuracy

- Width max. 700 cm, depth max. 500 cm
- With 2 to 3 posts *(depending on load and type)*
- Optional roof pitch: 3° to 20° (stepless)
- Box flush with wall
- Options:
LED lighting,
radiant heater



The Murano Vetro glass roof provides protection from the weather at any time of the year, thus extending the patio season. The elegant structure can be installed relatively easily on virtually any patio and its generous maximum dimensions make it suitable even for wide expanses. A choice of types and styles is available with posts that are in line with the front profile and positioned laterally flush or inwards.

III. top: Overhang type with posts positioned laterally inwards (style Ü2).

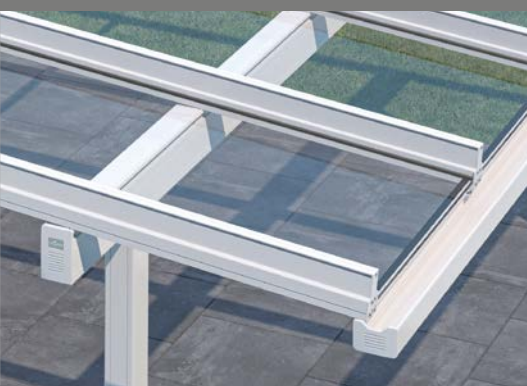

Overhang type (Ü)

with recessed posts

Here the posts can be positioned on the patio, for example, and the roof overhang extended beyond this. Rainwater is drained via a rain chain of stainless steel (standard) or optionally via downpipes.





*Murano Integrale Overhang type
with laterally flush posts
[style Ü1]*

Murano Integrale – glass roof with awning

Optimal protection with integral sunshade



Overhang type (Ü)


with recessed posts

Here the posts can be positioned on the patio, for example, and the roof overhang extended beyond this. Rainwater is drained via a rain chain of stainless steel (standard) or optionally via downpipes.



Customised protection from the elements

- Width max. 700 cm, depth max. 500 cm
- With 2 to 3 posts *(depending on load and type)*
- Optional roof pitch: 3° to 20° (stepless)
- Cassette flush with wall

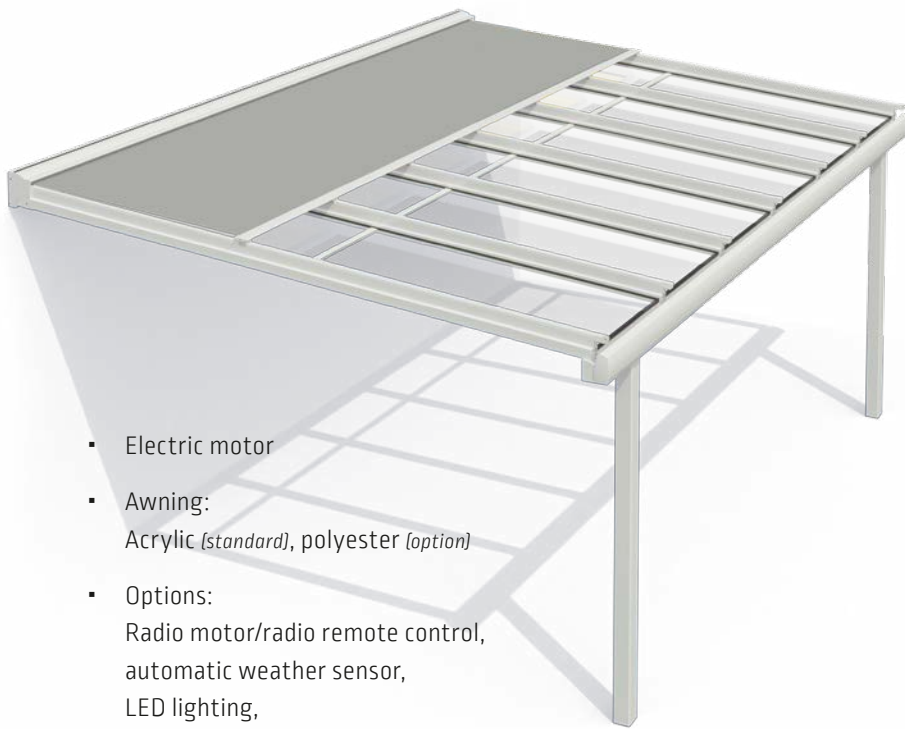

- Electric motor
- Awning:
Acrylic *(standard)*, polyester *(option)*
- Options:
Radio motor/radio remote control,
automatic weather sensor,
LED lighting,
radiant heater



Murano Integrale offers variable shelter from the rain, the temperature and the sun-light. With an awning integrated into the wall profile, this model combines the transparency and protection of a glass roof with the advantages of a high-quality awning for adjustable shade from the sun. Various types and styles with posts in line with the front profile and flush or positioned inwards laterally are available to choose from, even for this generously proportioned glass roof.

*Flush type
with laterally recessed posts
[style B2].*



Flush type (B)

with front-facing posts

*The posts are in line with the gutter
for a compact, modern look.
Rainwater is drained via the rafters,
gutter and down the inside of the post.*





All-round glazing

*Murano Vetro glass roof with sliding glass panels:
Side-opening type on the side walls, 4-track with 4 panels,
Centre-opening type at the front, 2-track with 4 panels.
Equipped with optional triangular infill
with glass retaining strips (type A).*

Murano Glissando – sliding glass panels

Flexible, customised weather protection



Side-opening type

All glass panels are slid to one side left or right for opening. Depending on the desired width and height, 2, 3, 4 or 5 sliding panels can be mounted on 2, 3, 4 or 5 tracks.

Tailor-made comfort

- For glass roofs and permanently modified wall niches
- For all types and styles of Murano glass roofs from Lewens
- Max. width:
Centre-opening type 1150 cm,
Side-opening type 580 cm
- Wall height max. 260 cm
(with single-pane safety glass 10 mm)
- Options:
Lock,
cross member
(when using the glass wall
as a side wall for the glass roof),
triangular infill,
wall connection profile



Good guidance:

a cross member for attaching the top running rail is required for the installation of sliding panels on the side walls of the glass roof.

Shapely recessed handles

for smooth opening and closing of the sliding panels.

A transparent rubber trim closes the gap on the centre-opening type.



Triangular infill (option)

The triangular opening remaining can be glazed optionally to prevent the ingress of wind and weather above the side walls. (Here: type B with glass retainer clips)

Murano glass roofs can be fitted with sliding glass side walls offering protection from the wind and weather. The glass walls consist of 2 to 10 upright glass panels creating a transparent wall. Concealed ball-bearing rollers guarantee virtually silent running.

Centre-opening type

The panels are slid apart to the left and right for opening. Depending on the desired dimensions, 4, 6, 8 or 10 sliding panels can be mounted on 2, 3, 4 or 5 rails.





Glass retaining strips (Type A)

The glass is attached flush with the surround and virtually invisibly using glass retaining strips at the top and bottom. An air gap remains underneath the box/cassette as well as a gap to the wall.




Glass retainer clips (Type B)

A visually attractive, almost "floating" attachment that leaves a gap open around the glass.


Option Triangular infill

The cross member for attaching the top running rail is a prerequisite for the installation of sliding glass panels. It leaves a triangular opening free below the glass roof, which can be glazed optionally to prevent the elements from encroaching above the side walls.

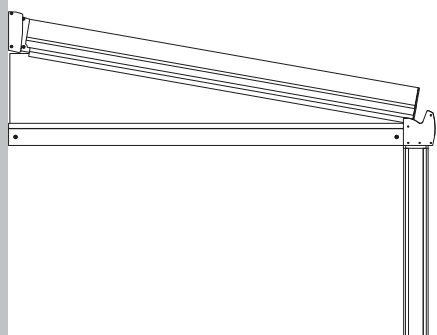

Virtually invisible:
Triangular infill with
glass retaining strips

"Floating" attachment:
Triangular infill with
glass retainer clips

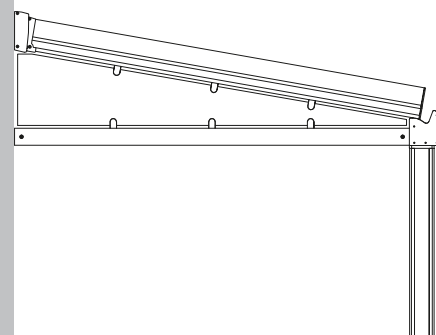



Inclined section type

for permanent glazing of side walls

Can be used to close the space between the roof and side glazing without any gap.

Below this, either rail systems for Glissando sliding glass panels or permanent rectangular glazing can be installed.



Rectangular type

for permanent glazing of rectangular spaces

The solution for glazing down to the ground at the front and back of the glass roof ...

... and as a complement to the inclined section on side walls for

complete glazing

of entire glass roof sides.

Murano Finestra

Permanent glazing

Permanent glazing is the best way to achieve maximum protection from wind, weather and draughts. This can be realised as partial glazing of individual wall sections or complete glazing of entire walls up to 500 cm wide.



Seamless connection

Glass frame profiles border the glass panels all round and perfectly enclose the space between the glass roof and vertical glazed panels.



Guaranteed quality



CE
EN 1090
EN 13561

**TÜV-tested quality
and CE standard:**

Look out for the seal and the
mark guaranteeing the technical
safety of our products.

Flush with the wall:

*imperfections can be compensated for
smoothly on assembly*



Glass joint

*With divided glass panes, the so-called
glass joint is concealed by trims in the frame
colour and thereby turned into a decorative
element.*

*The position of the glass joint (division of the
glass panes) is optional.*

Minimal light gap

(Murano Integrale)

*The front profile is taken up to the gutter,
thus reducing the light entering.*



Quality and technology made in Germany

Thanks to their clean, modern design, quality and a variety of equipment options, glass roof systems from Lewens make a convincing impression. Centimetre-accurate manufacturing, even in intermediate sizes, ensures a perfect fit in virtually any desired location.



Branded goods from Germany:

Lewens glass roofs are manufactured in Germany
–quality “made in Germany”!



**Radio controllers in io technology
from Somfy**

create the prerequisites for integrating all patio functions into the home automation system (TaHoma, Connexoon), with convenient operation by tablet or smartphone.




Automatic weather sensor

Sun and wind monitors and wind sensors to io standard ensure automatic, weather-dependent control of awnings – even when there's no one at home.



Infrared radiant heaters

to io standard create a cosy atmosphere and pleasant warmth under awnings and glass roofs, even on chilly days.

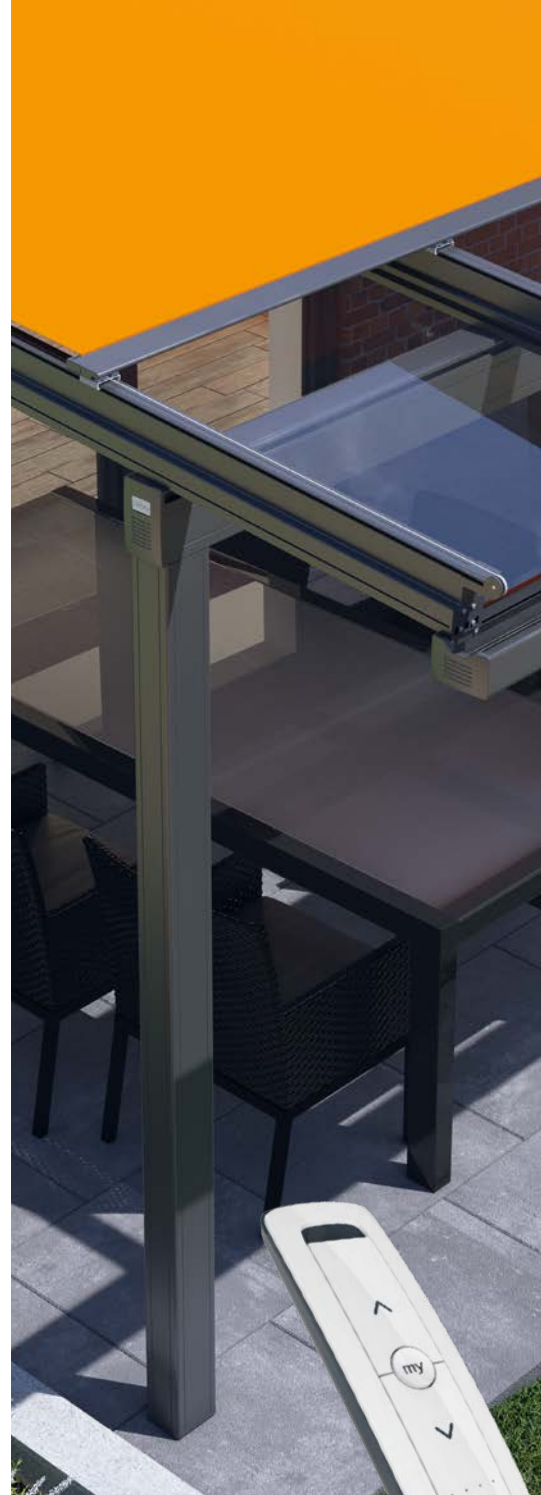

Options

Electrical

Want more than the wall switch for operation and other comfort features too? Then you have the choice of radio control systems, lighting, radiant heater and automatic weather sensor components meeting the contemporary Somfy io standard, which can all be integrated into the home automation system (TaHoma, Connexoon). All patio functions can thus be conveniently operated via tablet or smartphone.




LED lighting

Equipped with a radio receiver for io technology (option), suitable mood lighting for any situation can be created by remote control or via the home automation system.





Standard RAL colours **at no extra charge**:

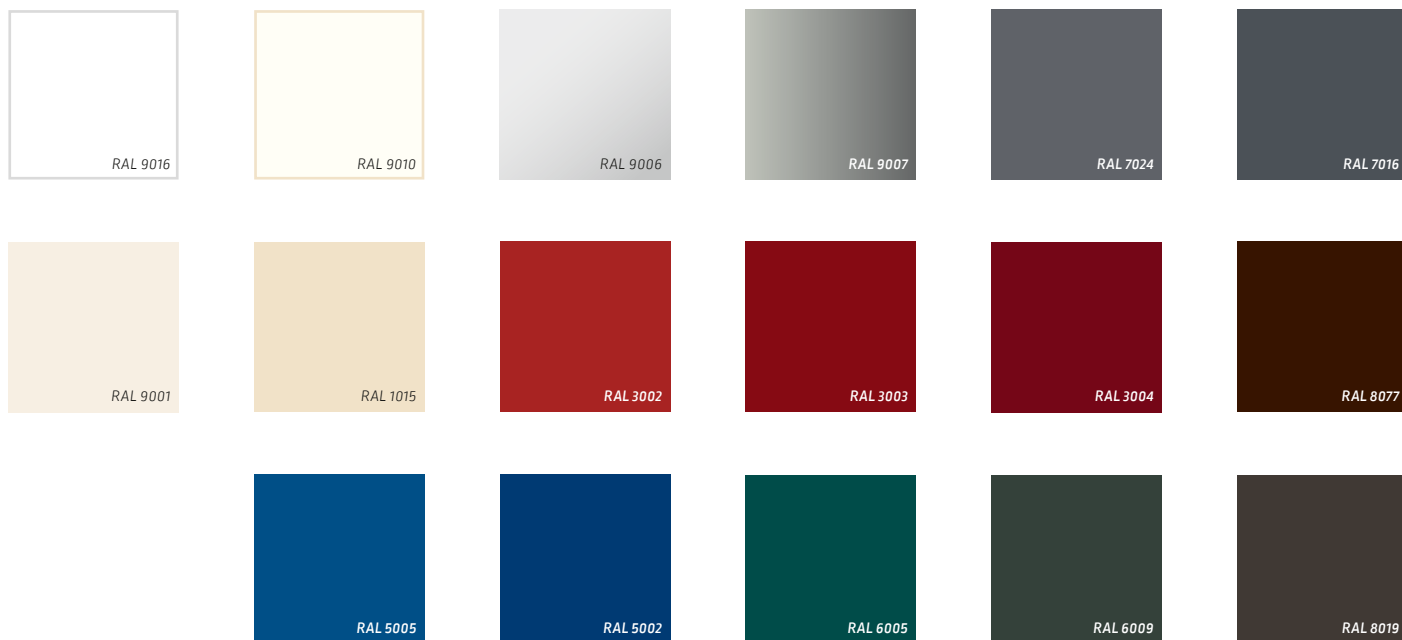

Textured finishes **at no extra charge**:



Frame colours to order

The frames of Lewens glass roofs and awnings are given a high-grade powder coating, rendering them particularly UV- and weather-resistant. An optional preanodising treatment increases the durability of the coating for products used in coastal regions. Hundreds of RAL colours and textured finishes are available to choose from, including a wide range of contemporary colours offered as standard at no extra charge.



Preanodising [optional]:

An optional preanodising treatment increases the durability of the coating for products used in coastal regions in particular. This can be selected when ordering.

Colour deviations are possible due to the printing process used.

With well over 300 designs to choose from, the Lewens collection offers you high-quality, spun-dyed acrylic and polyester fabrics that retain their colour brilliance for a long time. Semi-transparent, glass fibre woven screen fabrics and Soltis 92 complete the range, which features modern and classic designs, solid colours, fine textures and 3D effects across the entire colour spectrum.

Lewens awning fabrics have been created especially for use outdoors and are treated to make them water- and dirt-repellent. We make the awnings up using the latest sewing techniques for distortion-free seams and also using ultrasonic bonding. We have designed our manufacturing facility so that the awning fabrics can be laid out entirely flat (not folded) for making up.

Some of our quality features:

- Secure lockstitch used for making up, optionally also with ultrasonically bonded seam (surcharge).
- Awning and valance are produced from one piece (identical repeat pattern)
- Seams on top and bottom and valance seam neatened (clean completion)
- Repeat-symmetrical completion left and right
- Use of Tenara® quality sewing yarn (also for valances)

The Collection

Fabrics ranging
from modern to classic

*For vertical awnings as a complement to the glass roof, **glass fibre woven screen fabrics** are recommended to provide shade from the sun and glare while affording a view outwards.*





Murano Puro | Vetro

Equipment and technical features






Manufactured and assembled in Germany
TÜV-tested safety
Quality and technology CE-compliant

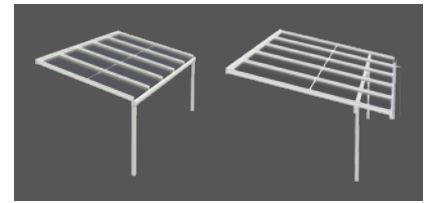

	Murano Puro Flush (B) Type	Murano Vetro Flush (B) Type	Murano Vetro Overhang (Ü) Type
Styles	B1, B2, B3	B1, B2, B3	Ü1, Ü2, Ü3
– Posts laterally external	B1	B1	Ü1
– Posts laterally recessed	B2	B2	Ü2
– with 3rd support	B3	B3	Ü3
– Overhang (inner edge of post – outer edge of gutter)	–	–	30 - 100 cm
– Reinforcement: steel (s)/Murano Vetro gutter (v)	... v	... s	... s
Dimensions (max.)			
Width, 1 unit (single field)	700 cm	700 cm	700 cm
Depth (type B: to inner edge of post; type Ü: to outer edge of gutter)	350 cm	500 cm	500 cm
Pitch angle, stepless (at least 5° recommended)	3° - 10°	3° - 20°	3° - 20°
Rafter spacings (max., depending on type, roof size, load)	120 cm	120 cm	120 cm
Post height (max., standard 240 cm)	350 cm	350 cm	350 cm
Rainwater drainage			
Downpipe integrated into post	■	■	–
Downpipe, external in front of post	–	–	□
Rain chain + water spout (1 of each)	–	–	■
Glazing			
for laminated safety glass (LSG, clear) or twin-wall sheets	!	!	!
Frame colours			
17 RAL colours + 6 textured finishes (Lewens standard colours)	■	■	■
Additional RAL, special colours and effect finishes	□	□	□
Options			
Lighting - LED strips, LED spot bar	□	□	□
Radiant heater (only wall attachment)	□	□	□
Glass joint	□	□	□
Additional rain chain/water spout or downpipe	□	□	□
Lateral connection profile/various profiles	□	□	□
Support frame	□	□	□

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

■ Standard □ Option – not available
! Not included in scope of supply

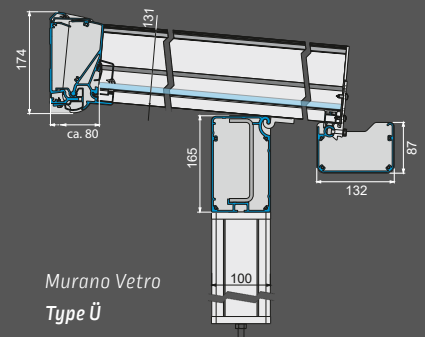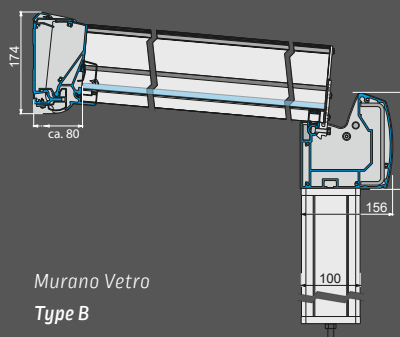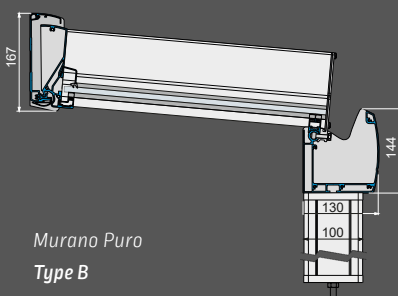


Murano Integrale

Equipment and technical features



Manufactured and assembled in Germany
TÜV-tested safety
Quality and technology CE-compliant


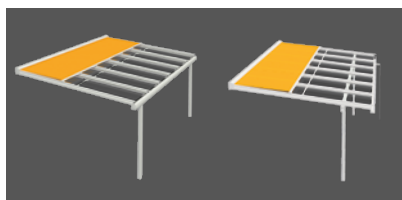


Styles	Flush (B) Type	Overhang (Ü) Type
	B1, B2 B3	Ü1, Ü2, Ü3
– Posts laterally external	B1	Ü1
– Posts laterally recessed	B2	Ü2
– with 3rd support	B3	Ü3
– Overhang (inner edge of post – outer edge of gutter)	–	30 - 100 cm
– Reinforcement: steel (s)	... s	... s
Dimensions (max.)		
Width, 1 unit (single field)	700 cm	700 cm
Depth (type B: to inner edge of post; type Ü: to outer edge of gutter)	500 cm	500 cm
Pitch angle, stepless (at least 5° recommended)	3° - 20°	3° - 20°
Rafter spacings (max., depending on type, roof size, load)	120 cm	120 cm
Post height (max., standard 240 cm)	350 cm	350 cm
Rainwater drainage		
Downpipe integrated into post	■	–
Downpipe, external in front of post	–	□
Rain chain + water spout (1 of each)	–	■
Glazing		
for laminated safety glass (LSG, clear) or twin-wall sheets	!	!
Drive		
Electric motor (for wall switch)	■	■
Radio motor (io or RTS)	□	□
Frame colours		
17 RAL colours + 6 textured finishes (Lewens standard colours)	■	■
Additional RAL, special colours and effect finishes	□	□
Awning fabrics from the LEWENS collection		
Branded acrylic (spun-dyed, ultra fade resistant)	■	■
Branded polyester (spun-dyed, ultra fade resistant)	□	□
Tenara quality sewing yarn	■	■
Corner reinforcement and lateral seam (10 cm)	■	■
Options		
Radio motor + radio remote control (io or RTS)	□	□
Automatic weather sensor (sun, wind, rain)	□	□
Lighting - LED strips, LED spot bar	□	□
Radiant heater (only wall attachment)	□	□
Glass joint	□	□
Additional rain chain/water spout or downpipe	□	□
Lateral connection profile/various profiles	□	□
Support frame	□	□


Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

■ Standard □ Option
– not available

! Not included in scope of supply

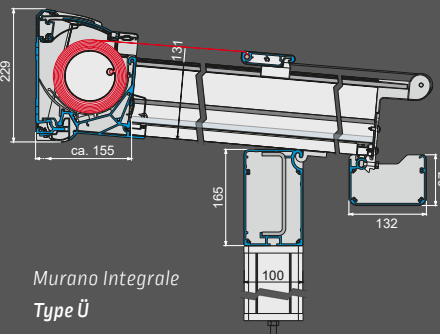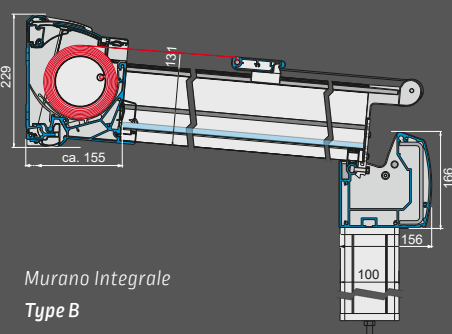


Types and styles



B1 flush, external

B1s as B1, with steel reinforcement (not Murano Puro)


B1v as B1, with Murano Vetro gutter (only Murano Puro)



B2 flush, laterally recessed

B2s as B2, with steel reinforcement (not Murano Puro)


B2v as B2, with Murano Vetro gutter (only Murano Puro)



B3 as B1, with 3rd support


B3s as B3, with steel reinforcement (not Murano Puro)

B3v as B3, with Murano Vetro gutter (only Murano Puro)




Ü1 rafter overhang, external

Ü1s as Ü1, with steel reinforcement



Ü2 rafter overhang, laterally recessed

Ü2s as Ü2, with steel reinforcement



Ü3 as Ü1, with 3rd support



Ü3s as Ü3, with steel reinforcement

Murano Glissando

Equipment and technical features



Manufactured and assembled in Germany
TÜV-tested safety
Quality and technology CE-compliant




Type	Side-opening	Centre-opening
Number of tracks	2 - 5	2 - 5
Number of panels	2 - 5	4 - 10
Dimensions		
2-track width (max.)	330 cm	540 cm
Number of panels	2	4
3-track width (max.)	470 cm	720 cm
Number of panels	3	6
4-track width (max.)	520 cm	920 cm
Number of panels	4	8
5-track width (max.)	580 cm	1150 cm
Number of panels	5	10
Width of single panels (min./max.)	60 - 130 cm	60 - 130 cm
Overlap of single panels	approx. 5 cm	approx. 5 cm
Height 8 mm toughened safety glass (max.)	230 cm	230 cm
Height 10 mm toughened safety glass (max.)	260 cm	260 cm
Scope of supply (without attachment material)		
Bottom running rail (can be surface-mounted or inset)	■	■
– installation depth bottom running rail (max.)	35 mm	35 mm
– anti-lift device	■	■
Top guide rail	■	■
End caps in frame colour	■	■
Recessed handles (brushed stainless steel, polished, standard h 105 mm)	■	■
Locking mechanism (walk-in panel w. foot lever, stationary panel w. socket screw)	■	■
Glazing (with laminated safety glass, clear in 8 or 10 mm)		
including glass	■	■
without glass with dimension data	■	■
Frame colours		
17 RAL colours + 6 textured finishes (Lewens standard colours)	■	■
Additional RAL, special colours and effect finishes	□	□
Bottom running rail always E6/EV 1 silver anodised	■	■
Options		
Lock (at handle height)	□	–
Wall connection profile	□	□
Cross member + accessories (for use as side wall)	□	□
Profiles or retainer clips for triangular infill (without glass)	□	□

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

■ Standard □ Option
– not available

Possible types

2-track




2L or 2R

2 panel

2L+2R

4 panel

3-track




3L or 3R

3 panel

3L+3R

6 panel

4-track




4L or 4R

4 panel

4L+4R

8 panel

5-track




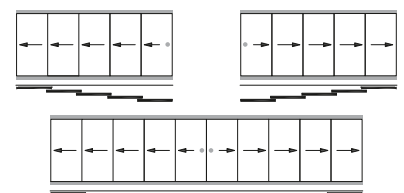


5L or 5R

5 panel

5L+5R

10 panel





Murano Finestra

Equipment and technical features



Manufactured and assembled in Germany
Quality and technology CE-compliant




Type	Rectangle	Inclined section
With uprights	■	■
Number of uprights	Width-dependent (acc. to max. single panel width)	
Dimensions		
Width (max.)	500 cm	500 cm
Width of single panels (max.)	120 cm	120 cm
Height (max.)	230 cm	230 cm
Glazing		
without glass (with dimension data for LSG, clear in 8 or 10 mm)	■	■
Frame colours		
17 RAL colours + 6 textured finishes (Lewens standard colours)	■	■
Additional RAL, special colours and effect finishes	□	□
Equipment		
Drainage slots	■	■
Options		
Extra upright	□	□
Connection profile for Murano glass roof rafters	—	□
Attachment set for Murano glass roof rafters	—	□
Factory connection of rectangular and inclined section elements (full glazing)	□	□
Reinforcement profile for full glazing (required above 300 cm width due to wind load)	—	□
Wall connection profile	□	□
Finishing profile	□	□

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.


■ Standard □ Option — not available

Possible types and applications

Rectangle




Glass roof front




Glass roof side(s)


Inclined section



Side wall triangular infill




+ Glissando sliding glass panels




+ rectangle
= full glazing

Section

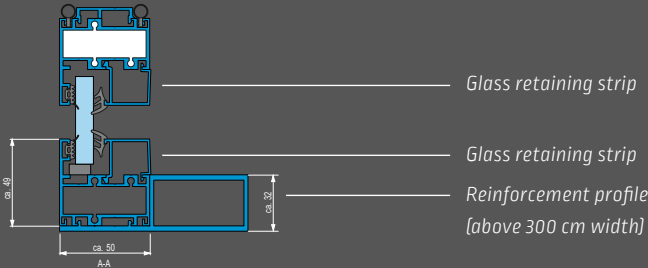


Detail



TO MATCH:

Glass roof awning

Ancona

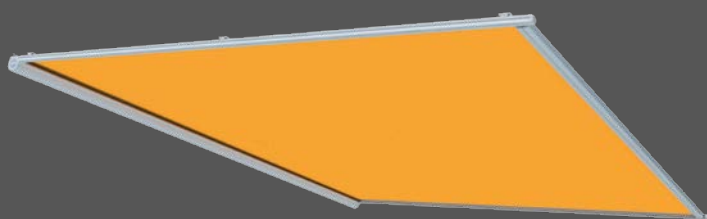

Glass roof awning


Capri



Types



Interior



Roof-mounted (incl. roof cover)

Equipment

Cassette

- for conservatory / glass roof
- Interior or roof-mounted installation

Width 1 unit max. 600 cm

Drop max. 450 cm

Drive Motor ■

■ Standard




Options


- Radio motor + radio remote control
- Automatic weather sensor
- Fabric support wire
- Interior type: **roof cover**
- Interior type: **Vario Valance**



Types



Roof-mounted



Pergola

Equipment

Cassette

- for conservatory / glass roof
- self-supporting as pergola

Roof-mounted

Width 1 unit max. 700 cm

Joined system max. 1200 cm

Drop max. 600 cm

Pergola

Width 1 unit max. 600 cm

Drop max. 600 cm

Drive Motor ■

■ Standard


Options

- Radio motor + radio remote control
- Automatic weather sensor
- Extra fabric supports



Side screen awning

Micro 700

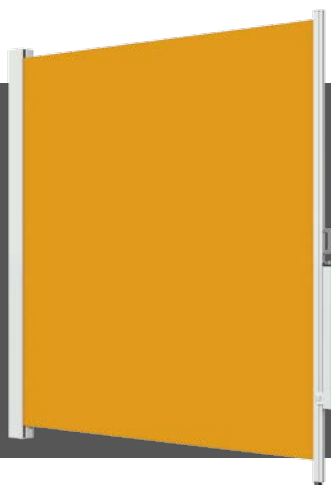

Types



Equipment

Side screen awning	
Wall cassette	
Screen height	up to max. 250 cm
Extension, depending on height and fabric	max. 400 cm
Attachment	
Wall bracket	<input checked="" type="checkbox"/>
Post	<input type="checkbox"/>
Drive	Manual operation <input checked="" type="checkbox"/>

Fabric

Acrylic/Soltis 92	<input checked="" type="checkbox"/>
Polyester	<input type="checkbox"/>

☒ Standard ☐ Option


Options

- additional handles




Screen awning

Micro 1060 Z / 4000 Z

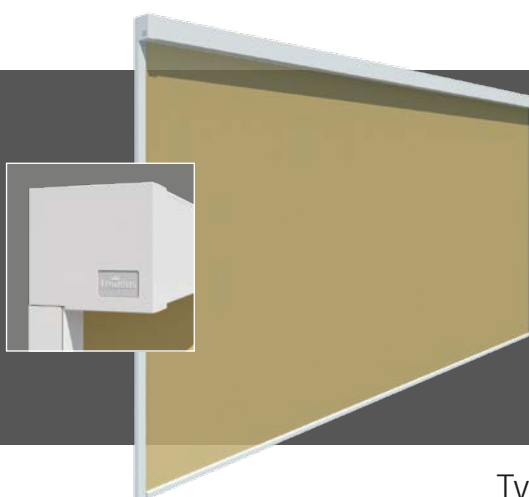

Types



Guide closed [Z]

Track with fabric guidance

Features

Vertical awning	
Cassette flush with wall, square	
Fabric	Micro 1060 Z 4000 Z
Screen	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>
Window awnings	<input type="checkbox"/>
Acrylic/Polyester	<input checked="" type="checkbox"/>
Drive	Crank <input type="checkbox"/> Motor <input checked="" type="checkbox"/>

Guide closed [Z] + motor

	Micro 1060 Z * 4000 Z
Width 1 unit max.	400 cm 550 cm
Width with acrylic/polyester max.	300 cm
Height max.	350 cm 600 cm
Height with acrylic/polyester max.	300 cm

☒ Standard ☐ Option * Micro 4000 Z only on Murano glass roof Overhang type

Options

- Radio motor + radio remote control
- Automatic weather sensor

Further information

can be found in the "Glass Roof Awnings",
"Façade Awnings" and "Micro 700" brochures.



www.lewens-markisen.de



Your stockist will be happy to advise you: